



WidgetLink

Introducing Link's latest distribution solution, Widget Link. This new line of distribution products allows the use standard Cat5 and Cat6 cabling to send multiple signals down a single cable. The use of Cat5/6 cable can be applied to DMX, analog audio, AES/EBU digital audio, and even hybrid combinations including 10/100 ethernet.

1, 2, 3, or even 4 discrete signals can be sent down each cable, however shielded cable is required for 4 channels, as well as the hybrid combinations. If using phantom power with analog signals, shielded type cable is also required.


Total maximum length can be increased using Cat5/6 cable for AES signals from 100 meters on standard 110 ohm AES twisted-pair type cable, to 400-800 meters on Cat5/6 cable, depending on the equipment being used. If being used with the hybrid ethernet configuration, you are limited to the maximum length of the ethernet signal. The maximum length for DMX over Cat5/6 cables is 550 meters.

Link's Eurocable brand of cable is guaranteed to provide the upmost dependable signal using Widget Link products, especially with our CVS LK Cat6 STP cable. Other hybrid solutions can be offered using our various cable configurations such as our CVS LK 1CAT6S 12/3 cable, providing a 12/3 power line and shielded Cat6 line for "driveline" type applications.

- Multiple signals down a single Cat5/6 Cable
- Supports DMX, Analog Audio, and AES Digital Audio
- Hybrid solutions available including 10/100 Ethernet
- 4 total channels if using shielded cable
- "Fan," "barrel," and stage box type configurations
- Custom configurations available




Typical application using EUROCABLE CVS LK 1CAT6 12/3

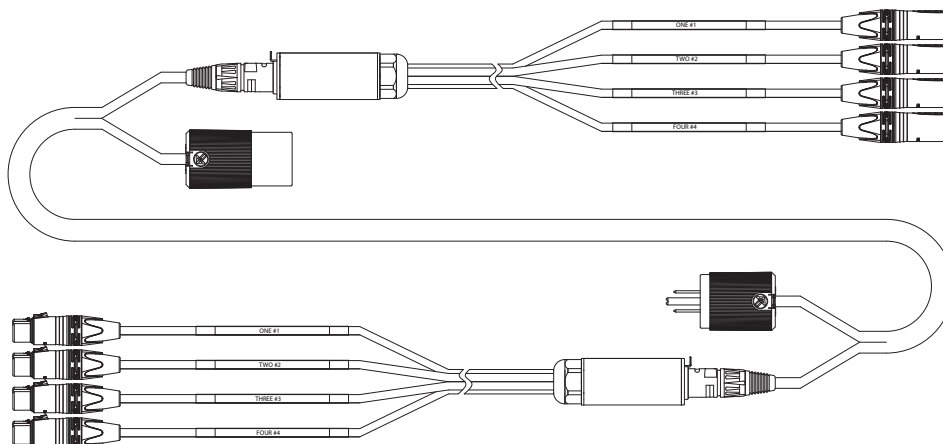


Standard models


WDO CAT4DMX56 - DMX RJ45 Fan Out with Female XLR 5 Pin, 4 Universe, 6 Ft.

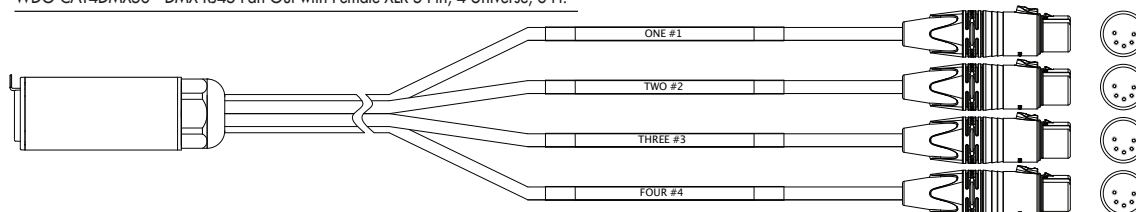


WDI CAT4DMX56 - DMX RJ45 Fan In with Male XLR 5 Pin, 4 Universe, 6 Ft.

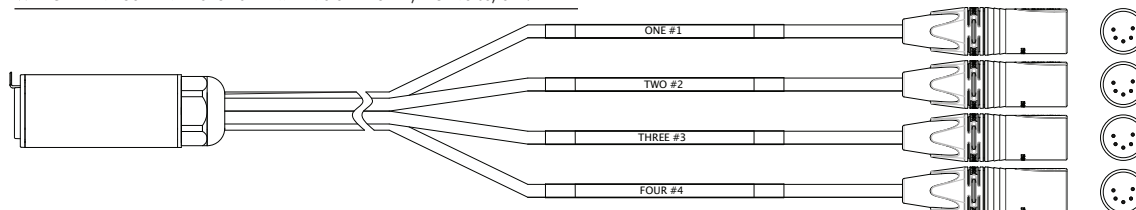


WDI CAT4XLR3P6F - Widget, RJ45 Fan In with Female XLR 3 Pin, 4 Channel, 6 Ft.

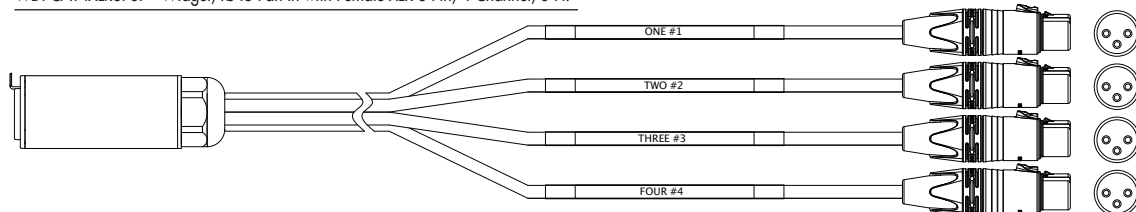


WDO CAT4XLR3P6F - Widget, RJ45 Fan Out with Male XLR 3 Pin, 4 Channel, 6 Ft.

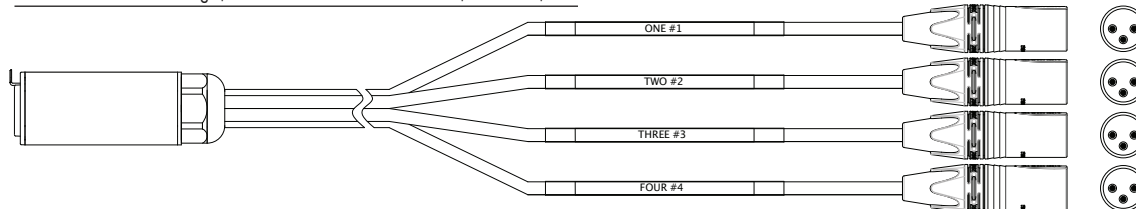

WDO VDRIVE 6 - Widget, VDrive Compatible, Fan Out, 6 Ft.

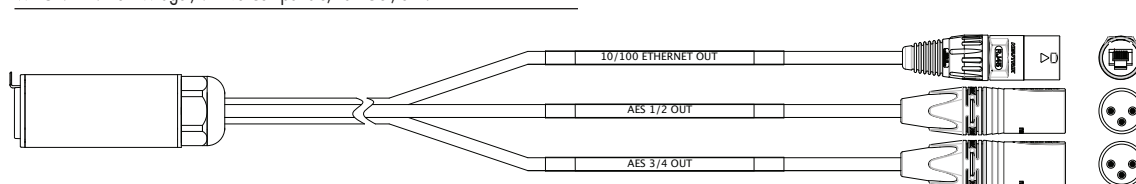

WDI VDRIVE 6 - Widget, VDrive Compatible, Fan In, 6 Ft.

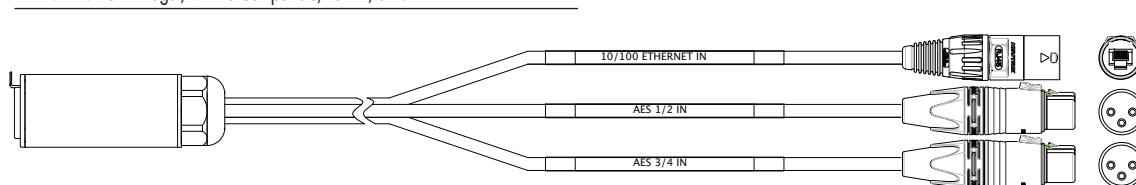

**Other configurations available upon request.
Please call or email for more details.**